


X-curve

Enrich your table with the X-curve pendant by ONE A. The sleek X-curve pendant consists of an anodized base with a beautiful hand-wrapped leather cord detail – honoring ONE A's design philosophy.

The pendant is ideal for dining- and meeting tables as it is dimmable and therefore enables you to create the desired atmosphere.

Honeycombs in the lamp-heads prevent glaring.

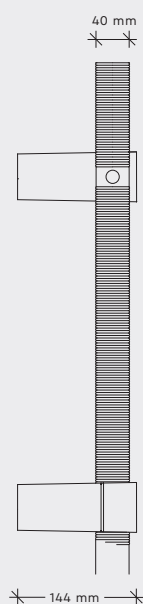

The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal
For more information, please contact info@onea.dk

X-CURVE

DATA

Collection	ONE A
Product	X-curve
Article no.	1A11.4071.XX66.36ZZ (X-C6) 1A11.4072.XX66.36ZZ (X-C12)

SPECIFICATIONS

Material	Aluminium and leather
Labelling	CE

ELECTRICAL SPECIFICATIONS

Voltage	230V
Dim	Yes – compatible with leading and trailing edge phacecut dimmers
Insulation class	Class I
IP protection grade	IP20
Light Source	LED included – 1AL.20.DW ➤
Beam	36° Lens
Energy Class	This product contains energy class G light sources

DIMMER COMPATIBILITY

		BU Dimmer																			
		A		B		C		D		E		F		G		H					
		Schneider electronic 9803159C		VADO50 V0200		NKKO (210-016)		BUSCH (6523U)		OPUS (739.01)		OPUS (29.07)		OPUS (739.08)		OPUS (746.03)					
Dimmer	1AL.20.XX	Result	Pow	Pan	Result	Pow	Pan	Result	Pow	Pan	Result	Pow	Pan	Result	Pow	Pan	Result	Pow	Pan	Result	Pow
	200V	✓	8.664	1.792	✓	8.493	0.811		9.176	1.835	✓	8.29	Cut off	✓	9.133	Cut off	✓	9.133	Cut off	✓	9.09
	240V	✓	8.664	2.176	✓	8.536	1.195	slightly flash at the low limit	9.603	4.225	✓	9.346	Cut off	✓	9.517	Cut off	✓	9.688	Cut off	✓	9.56
	264V	✓	8.706	2.39	✓	8.664	1.406		9.517	6.103	✓	9.517	2.048	✓	10.24	Cut off	✓	9.944	Cut off	✓	9.816

XX-COLOUR CODES

92 Black Pearl	93 Elephant Grey
97 Gold	98 Silver

ZZ-COLOUR CODES


92 Black Leather	95 Dark Brown Leather
94 Tan Leather	96 Green Leather

STANDARDS:

EN 60598-1
EN 60598-2-1
EN 55015

NOTE

3m cord included

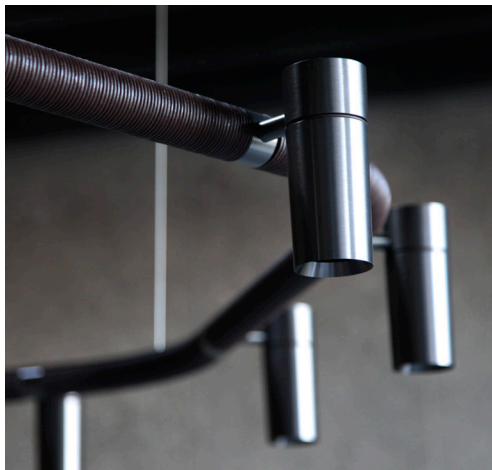

X-CURVE


SUSPENSION

X-C6

Wires: 3

Effect: 60W

Weight: 5,2 kg




X-C12

Wires: 3

Effect: 120W

Weight: 11 kg

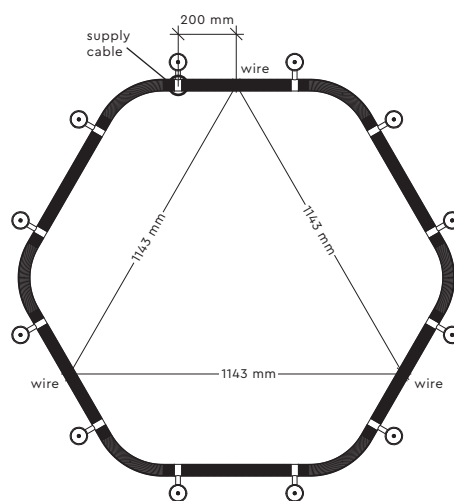

IMPORTANT INFORMATION

Installation and mounting must be performed by skilled personnel only, and instructions must be followed.

Always shut the power circuit off before starting work.

In some countries electrical installation work may only be carried out by an authorized electrical contractor. Please contact your local electricity authority for advice.

If the external flexible cable is damaged, it **MUST** be replaced by a special cable exclusively available from the manufacture.

The light sources contained within this fixtures **MUST** only be replaced by the manufacture or a similarly qualified person.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:


If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

X-TENDABLE wire suspension

ASSEMBLY INSTRUCTION


STEP 1

Mount the wire suspension to the ceiling with a screw.




STEP 2

Mount the wire lock in the wire suspension.




STEP 3

Guide the wire through the wire lock

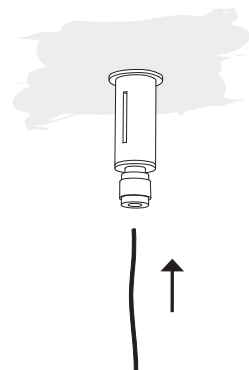

STEP 4

Then pull the wire out through the slot




STEP 5

Connect wire to power outlet. Make sure to obtain cable strain relief, check power outlet for instructions.

N - Neutral (blue)

⊕ - Ground (Green/Yellow)

L - Line (Brown)



IMPORTANT INFORMATION

Installation and mounting must be performed by skilled personnel only, and instructions must be followed.

Always shut the power circuit off before starting work.

In some countries electrical installation work may only be carried out by an authorized electrical contractor. Please contact your local electricity authority for advice.

If the external flexible cable is damaged, it **MUST** be replaced by a special cable exclusively available from the manufacture.

The light sources contained within this fixtures **MUST** only be replaced by the manufacture or a similarly qualified person.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:


If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

X-TENDABLE

LIGHT SOURCE REPLACEMENT


STEP 1

Remove the front tube by gently rotating.




STEP 2

Pull back the spring.



STEP 3

Disconnect the light source and replace with the new light source.



STEP 4

Gently release the spring. Then mount the front tube by slightly rotating the tube into place.

