
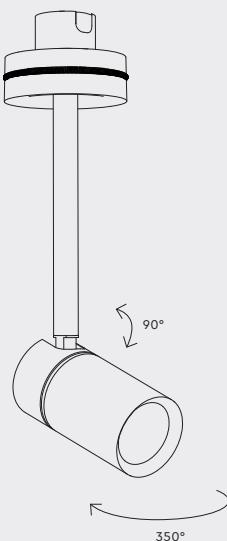


STORM SYSTEM®

The Storm Small Out is part of the STORM SYSTEM® collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

The Storm Small Out is designed to rotate 350° and angles 90°. A honeycomb louvre is placed inside the spot to avoid glaring.

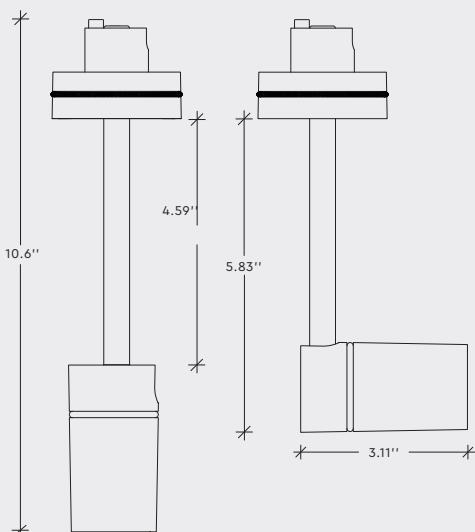

The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk

STORM SMALL OUT DIMMABLE

DATA

Collection	STORM SYSTEM®
Product	Storm Small Out
Article no.	1N00.0160.xxxy

SPECIFICATIONS

Weight	14.9 oz
Materials	Aluminium
IP protection grade	IP20
Labelling	



Conforms to ANSI/UL
Std. UL 2108:2015

Cert. to CAN/CSA
Std. CSA C22.2#250.13:2017

Intertek

5005519

0,3m

Class III

For xx-codes review STORM SYSTEM® – COLOUR CODES ➤

LED Constant Current (light source included)

5W | 35V | 130mA

YY CODES – light sources

65 – 2700K, 30°

67 – 3000K, 30°

For IES/LDT lux files review STORM SYSTEM® – LUX FILES ➤

NOTE: when using honey combs the lumen output will be reduced with 30% in efficiency

ADDITIONAL REQUIREMENTS

Junction Kit

review STORM SYSTEM® – CONFIGURATION ➤

This product shall always be powered by SELV LED driver, output voltage of this driver in open circuit must not exceed 60V. Do NOT cover the LED driver or locate LED driver on top of light fixture.

For further support contact LITES ON WEST
245 West 29th Street, 6th floor | NY, NY 10001
T: 212 775 6363 | F: 212 775 0355
E: info@litesonwest.com

OPTIONAL ACCESSORIES

1AL.B01 – 18° lens

1AL.B03 – 50° lens

NOTE

The light source contained in the fixture must only be replaced by the manufacturer

INSTALLATION DEPTH

The installation depth may vary depending on the chosen light source.


For specific light source conditions

- review STORM SYSTEM® – INSTALLATION DEPTH ➤

STORM SYSTEM®

The Storm Small Out is part of the STORM SYSTEM® collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

The Storm Small Out is designed to rotate 350° and angles 90°. A honeycomb louvre is placed inside the spot to avoid glaring.

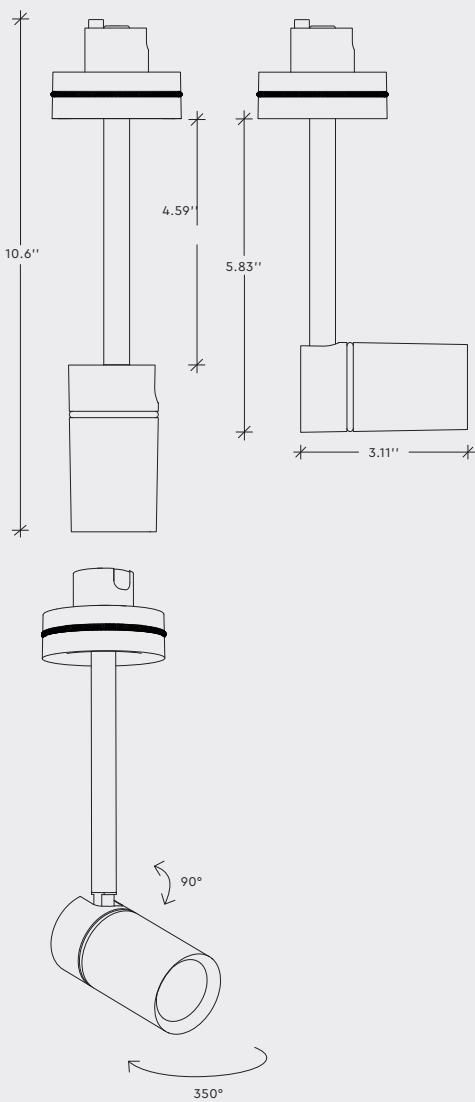

The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk

STORM SMALL OUT DIM TO WARM

DATA

Collection	STORM SYSTEM®
Product	Storm Small Out
Article no.	1N00.0160.xx66

SPECIFICATIONS

Weight	14.9 oz
Materials	Aluminium
IP protection grade	IP20
Labelling	



Conforms to ANSI/UL
Std. UL 2108:2015



Cert. to CAN/CSA
Std. CSA C22.2#250.13:2017

Safety distance	0,3m
Insulation class	Class III
Fixture finish	
Light source	For xx-codes review STORM SYSTEM® – COLOUR CODES > LED Constant Current (light source included) For IES/LDT lux files review STORM SYSTEM® – LUX FILES >
	NOTE: when using honey combs the lumen output will be reduced with 30% in efficiency
Supply	5W 18V 270mA
Lens	24°
CCT	3000–1800K

ADDITIONAL REQUIREMENTS

Junction Kit [review STORM SYSTEM® – CONFIGURATION >](#)

This product shall always be powered by SELV LED driver, output voltage of this driver in open circuit must not exceed 60V. Do NOT cover the LED driver or locate LED driver on top of light fixture.

For further support contact LITES ON WEST
245 West 29th Street, 6th floor | NY, NY 10001
T: 212 775 6363 | F: 212 775 0355
E: info@litesonwest.com

NOTE

The light source contained in the fixture must only be replaced by the manufacturer

INSTALLATION DEPTH

The installation depth may vary depending on the chosen light source.

For specific light source conditions

- [review STORM SYSTEM® – INSTALLATION DEPTH >](#)



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

last updated 02 - 12 - 2021

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed.

Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:

Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

COMPONENTS

- Storm Small Out



STORM SMALL OUT

ASSEMBLY INSTRUCTION

STEP 1


Make sure main power is off!

Mount the chosen Junction Kit

Then mount the fixture into the plaster ring/backmounted ring.


Do this by slightly rotating

NOTE: When rotating the fixture choose the direction with the least resistance.

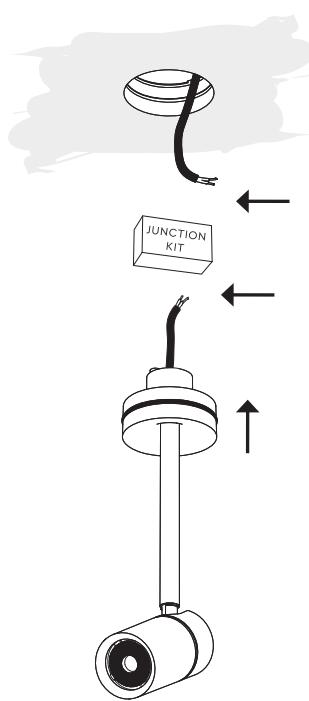


STEP 2

Adjust the fixture to the desired position.

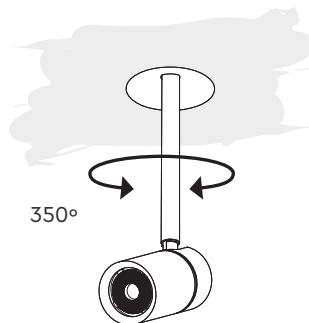

PLEASE NOTE:

If the spring on the fixture is damaged, do not proceed installation – contact your dealer!



90°

IMPORTANT INFORMATION

Disassembly must be performed by a certified electrician only, and instructions must be followed.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

STORM SMALL OUT


DISASSEMBLY INSTRUCTION

STEP 1

Make sure main power is off!

Take hold of the fixtures stem, and pull down gently, whilst slightly rotating.

NOTE: When rotating the fixture choose the direction with the least resistance.

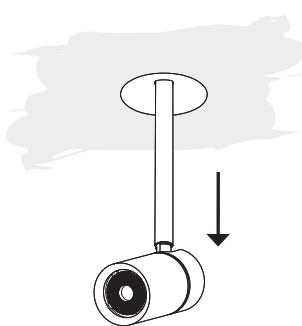

STEP 2

Disconnect the cables

