


# BULL PRECISION PENDANT

design: Lapo Grassellini



**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación


**120VAC**  
**120VAC**  
**120VAC**

**Power**  
 Pouissance  
 Potencia

**10W**  
**20W**  
**30W**



## Photometric diagrams

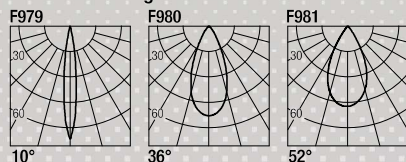

10W		
CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

20W		
CCT	Flux	CRI
2700K	1700 lm	98+
3000K	1830 lm	98+
3500K	1890 lm	98+
4000K	1950 lm	98+

30W		
CCT	Flux	CRI
2700K	2187 lm	98+
3000K	2310 lm	98+
3500K	2469 lm	98+
4000K	2538 lm	98+



## Code Construction

Construction du code produit  
 Construcción del código de producto

**BPP** | **X** | **X** | **XX** | **9** | **X**

<b>BPP</b>	<b>X</b> Power Pouissance Potencia	<b>X</b> Finishing Finitions Acabados	<b>XX</b> Color Temp. Température couleur Temperatura de color	<b>9</b>	<b>X</b> Beam angle Angle de faisceau Ángulo del haz
	<b>1</b> 10W	<b>1</b> White Blanc Blanco	<b>27</b> 2700K		<b>S</b> 10°
	<b>2</b> 20W		<b>30</b> 3000K		<b>M</b> 36°
	<b>3</b> 30W	<b>5</b> Black Noir Negro	<b>35</b> 3500K		<b>W</b> 52°
			<b>40</b> 4000K		
			<b>CU</b> Custom		

## BUX2NA - Included With Assembly

**Low luminance louvre**  
 Filtre basse luminance  
 Filtro de baja luminancia



**Drivers**  
 Alimentateurs  
 Alimentadores

**Integral**  
 ELV or 0-10V (Dual Dimming)  
 - Remote located driver option available