


# CADMO 6

design: Roberto Mantovani




**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA (V, 8.7V)**

**Power**  
 Pouissance  
 Potencia  
**4.5W (single)**  
**9W (double)**



## Photometric diagrams

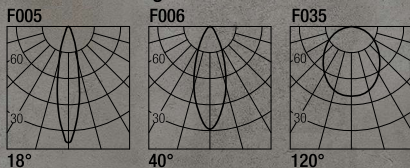

CCT	Flux	CRI
2700K	540 lm	98+
3000K	600 lm	98+
3500K	610 lm	98+
4000K	620 lm	98+



## Code Construction

Construction du code produit  
 Construcción del código de producto

PXP | X | X | XX | X | X |


PXP	X	Emission	X	Finishing	XX	Color Temp.	X	Beam angle	X	Beam angle
		Émission Emisión		Finitions Acabados		Température couleur Temperatura de color		Angle de faisceau Ángulo del haz		Angle de faisceau Ángulo del haz
		1 Single Unique Único		1 White Blanc Blanco		27 2700K		S 18°		S 18°
		2 Double Doble		2 Grey Gris		30 3000K		F 40°		F 40°
				5 Black Noir Negro		35 3500K		W 120°		W 120°
				9 COR-TEN		40 4000K		D Blind Borgne Ciego		D Blind Borgne Ciego
						CU Custom				

## Drivers

Alimentateurs  
 Alimentadores

## Series wiring

Câblage en série  
 Cableado en serie



0-10V 4.5W

**FLEXA-60-PRO-CC-10V**  
 Programmable 60W CC 0-10V Dimming  
 Dimming Range: 0.1%  
 Min. 1/Max. 6 Fixtures per Driver

9W

**FLEXA-60-PRO-CC-10V**  
 Programmable 60W CC 0-10V Dimming  
 Dimming Range: 0.1%  
 Min. 1/Max. 3 Fixtures per Driver

Phase 4.5W

**FLEXA-23-500-CC-ELV**  
 23W 500mA Constant Current  
 Dimming Range: 10%  
 Min. 3/Max. 5 Fixtures per Driver

9W

**FLEXA-23-500-CC-ELV**  
 23W 500mA Constant Current  
 Dimming Range: 10%  
 Min. 2/Max. 2 Fixtures per Driver

Phase 4.5W

**FLEXA-12-500-CC-ELV**  
 12W 500mA Constant Current  
 Dimming Range: 10%  
 Min. 1/Max. 2 Fixtures per Driver

9W

**FLEXA-12-500-CC-ELV**  
 12W 500mA Constant Current  
 Dimming Range: 10%  
 Min. 1/Max. 1 Fixtures per driver

Lutron 2-Wire Phase 4.5W

Hi-Lume 2-Wire Phase  
 500mA Constant Current  
 Dimming Range: 1%

**LTEA.1**  
 Min. 1/Max. 2 Fixtures per Driver

**LTEA.2**  
 Min. 2/Max. 4 Fixtures per Driver

**LTEA.3**  
 Min. 4/Max. 6 Fixtures per Driver

9W

**LTEA.1**  
 Hi-Lume 2-Wire Phase  
 500mA Constant Current  
 Dimming Range: 1%  
 Min. 1/Max. 1 Fixtures per Driver

**LTEA.2**  
 Hi-Lume 2-Wire Phase  
 500mA Constant Current  
 Dimming Range: 1%  
 Min. 2/Max. 2 Fixtures per Driver

Lutron Ecosystem 4.5W

**LDE.1**  
 Hi-Lume Ecosystem  
 500mA Constant Current  
 Dimming Range: 1%  
 Min. 1/Max. 3 Fixtures per Driver

9W

**LDE.1**  
 Hi-Lume Ecosystem  
 500mA Constant Current  
 Dimming Range: 1%  
 Min. 1/Max. 1 Fixtures per Driver

**LDE.2**  
 Hi-Lume Ecosystem Premier  
 500mA Constant Current  
 Dimming Range: 1%  
 Min. 3/Max. 5 Fixtures per Driver

**LDE.2**  
 Hi-Lume Ecosystem Premier  
 500mA Constant Current  
 Dimming Range: 1%  
 Min. 2/Max. 2 Fixtures per Driver