



# PEAK S1000 ON-OFF 110V

ver. 20200404\_Rev\_0

year: 2020  
code: 2550301A00600  
type: hanging lamp  
application: indoor

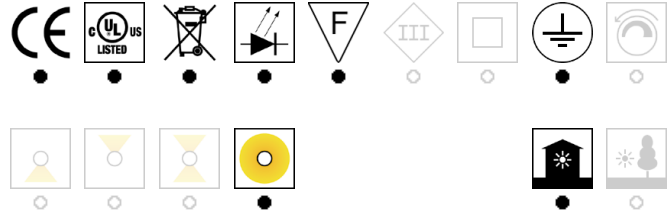

**Technical drawing**  
Size ref. image mm - inch

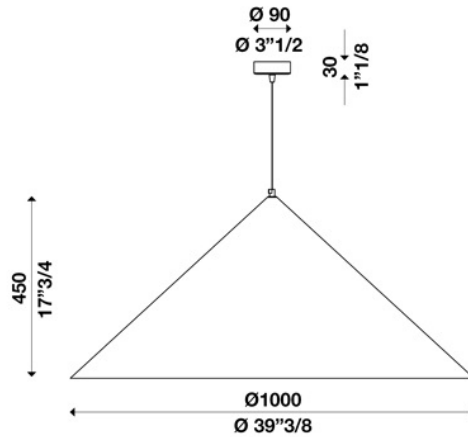

**Technical data**

Light source	LED bulb
Circuit structure	LED bulb
Light emission direction	diffused
Power	1x MAX 20W E26
Source lumens	
Source efficacy	
Consumption	1x MAX 20W E26
Delivered lumens	
Luminaire efficacy	
Secondary	
Colour temperature	
Colour rendering index	
Standard Deviation of Colour Matching	
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	●

**Optional**

Emergency mode	○
Motion sensor	○
Directional	○

**Packing**

Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

**Structure**

Material	
Finish	

**Diffuser**

Material	
Finish	

**Canopy**

Diameter ( Ø )	90 mm - 3" 1/2 inch
Height	30 mm - 1" 1/8 inch
Ceiling mount	direct / variants page 2

**Lampshade**

Material	fabric + polycarbonate
Finish	white outside / inside variants page 2

**Electronics / Driver**

Included	No
Quantity	
Voltage	100-120V 60 Hz

**Dimmable**



**Hanging cables**

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	2500 mm/100"


**Warranty**

Duration	2 years
----------	---------


# PEAK S500 ON-OFF 110V

ver. 20200404\_Rev\_0

year: **2020**  
code: **2550302A00600**  
type: **hanging lamp**  
application: **indoor**

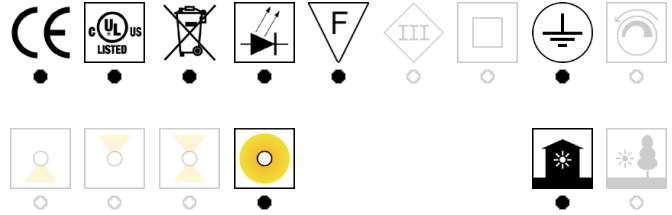

**Technical drawing**  
Size ref. image mm - inch

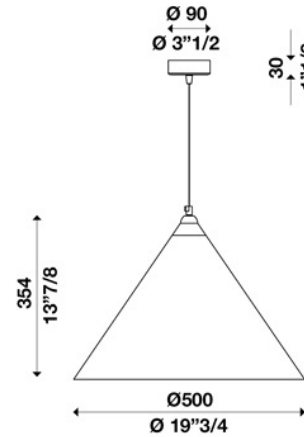

**Technical data**

Light source	LED bulb
Circuit structure	LED bulb
Light emission direction	diffused
Power	1x MAX 20W E26
Source lumens	
Source efficacy	
Consumption	1x MAX 20W E26
Delivered lumens	
Luminaire efficacy	
Secondary	
Colour temperature	
Colour rendering index	
Standard Deviation of Colour Matching	
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	●

**Optional**

Emergency mode	○
Motion sensor	○
Directional	○

**Packing**

Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

**Structure**

Material	
Finish	

**Diffuser**

Material	
Finish	

**Canopy**

Diameter ( Ø )	90 mm - 3" 1/2 inch
Height	30 mm - 1" 1/8 inch
Ceiling mount	direct / variants page 2

**Lampshade**

Material	fabric + polycarbonate
Finish	white outside / inside variants page 2

**Electronics / Driver**

Included	No
Quantity	
Voltage	100-120V 60 Hz

**Dimmable**



**Hanging cables**

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	2500 mm/100"

**Warranty**

Duration	2 years
----------	---------