


The Storm Medium Out is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the syrface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

Storm Medium Out is a ceiling- or wall-mounted fixture designed to rotate 350° and angle 90°. A honeycomb louvre prevents glare. The Storm Medium Out is part of a fixture family with the same lamp head but with different mounting solutions.

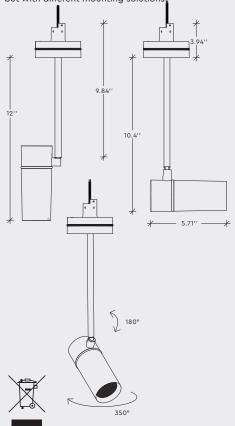

The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk

STORM MEDIUM OUT 250 cc

DATA

Collection STORM SYSTEM®

Product Storm Medium Out 250 - Constant Current

Article no. 1N01.0105.xx04

SPECIFICATIONS

Weight 28.2 oz

Materials Aluminium and Brass

IP protection grade IP20

Labelling



Conforms to ANSI/UL Std. UL 2108:2015

Cert. to CAN/CSA Std. CSA C22.2#250.13:2017

5005519

Safety distance 0,3m

Supply Constant Current max. rating: LED 15W

Insulation class Class III

Fixture finish For xx-codes review STORM SYSTEM® - COLOUR CODES >

ADDITIONAL REQUIREMENTS

Light Source & Junction Kit

MR16 LED (light source not included)
review STORM SYSTEM® – CONFIGURATION >


For IES/LDT lux files review STORM SYSTEM® - LUX FILES >

NOTE: when using honey combs the lumen output will be reduced with 30% in efficiency

This product shall always be powered by SELV LED driver, output voltage of this driver in open circuit must not exceed 60V. Do NOT cover the LED driver or locate LED driver on top of light fixture.

For further support contact LITES ON WEST 245 West 29th Street, 6th floor | NY, NY 10001

T: 212 775 6363 | F: 212 775 0355 E: info@litesonwest.com








The Storm Medium Out is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

Storm Medium Out is a ceiling- or wall-mounted fixture designed to rotate 350° and angle 90°. A honeycomb louvre prevents glare. The Storm Medium Out is part of a fixture family with the same lamp head but with different mounting solutions,

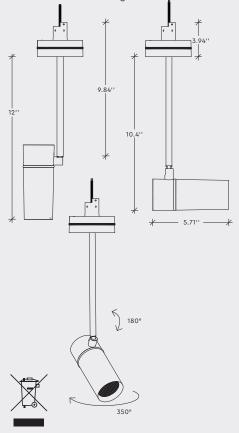

The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk

STORM MEDIUM OUT 250 GU5,3 CC

DATA

Collection STORM SYSTEM®

Product Storm Medium Out 250 - GU5,3 Constant Current

Article no. 1N01.0105.xx03

SPECIFICATIONS

Weight 28.2 oz

Materials Aluminium and Brass

IP protection grade IP20

Labelling



Conforms to ANSI/UL Std. UL 2108:2015

Cert. to CAN/CSA Std. CSA C22.2#250.13:2017

5005519

Safety distance 0,3m

Supply Constant Current GU5,3 max. rating: LED 8W

Insulation class Class III

Fixture finish For xx-codes review STORM SYSTEM® - COLOUR CODES >

ADDITIONAL REQUIREMENTS

Light Source & Junction Kit

MR16 LED (light source not included)


For further support contact LITES ON WEST 245 West 29th Street, 6th floor | NY, NY 10001

T: 212 775 6363 | F: 212 775 0355

E: info@litesonwest.com

NOTE

When using honey combs the lumen output will be reduced with 30% in effiency








The Storm Medium Out is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

Storm Medium Out is a ceiling- or wall-mounted fixture designed to rotate 350° and angle 90°. A honeycomb louvre prevents glare. The Storm Medium Out is part of a fixture family with the same lamp head but with different mounting solutions,

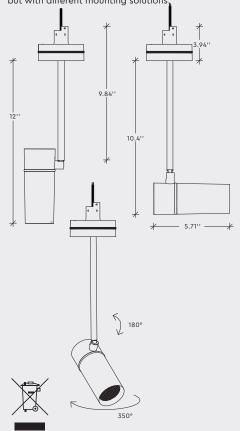

The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk

STORM MEDIUM OUT 250 GU5,3 12V

DATA

Collection STORM SYSTEM®

Product Storm Medium Out 250 - GU5,3 12V

Article no. 1N01.0105.xx02

SPECIFICATIONS

Weight 28.2 oz

Materials Aluminium and Brass

IP protection grade IP20

Labelling



Conforms to ANSI/UL Std. UL 2108:2015

Cert. to CAN/CSA Std. CSA C22.2#250.13:2017

5005519

Safety distance 0,3m

Supply 12V GU5,3 max. rating: LED 8W

Insulation class Class III

Fixture finish For xx-codes review STORM SYSTEM® – COLOUR CODES >

ADDITIONAL REQUIREMENTS

Light Source & Junction Kit

MR16 LED (light source not included)

For further support contact LITES ON WEST 245 West 29th Street, 6th floor | NY, NY 10001

T: 212 775 6363 | F: 212 775 0355

E: info@litesonwest.com

NOTE


When using honey combs the lumen output will be reduced with 30% in effiency





The Storm Medium Out is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

Storm Medium Out is a ceiling- or wall-mounted fixture designed to rotate 350° and angle 90°. A honeycomb louvre prevents glare. The Storm Medium Out is part of a fixture family with the same lamp head but with different mounting solutions,

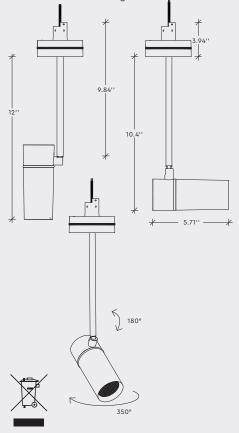

The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk

STORM MEDIUM OUT 250 GU10

DATA

Collection STORM SYSTEM®

Product Storm Medium Out 250 - GU10

Article no. 1N01.0105.xx01

SPECIFICATIONS

Weight 28.2 oz

Materials Aluminium and Brass

IP protection grade IP20

Labelling



Conforms to ANSI/UL Std. UL 1598:2018 Cert. to CAN/CSA Std. CSA C22.2#250.0:2018

199499

Safety distance 0,3m

Supply 120V GU10 max. rating: LED 8W

Insulation class Class I

Fixture finish For xx-codes review STORM SYSTEM® – COLOUR CODES >

ADDITIONAL REQUIREMENTS

Light Source & Junction Kit

MR16 LED (light source not included)

For further support contact LITES ON WEST 245 West 29th Street, 6th floor | NY, NY 10001

T: 212 775 6363 | F: 212 775 0355 E: info@litesonwest.com

NOTE

When using honey combs the lumen output will be reduced with 30% in efficiency

