

STORM MEDIUM WALL 160 GU10




STORM SYSTEM®

The Storm Medium Wall is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

The Storm Medium Wall is designed to be installed on walls or ceilings with minimum build-in depth. The fixture is mounted directly on the surface.

The Storm Medium Wall is designed to rotate 350° and angles 180°. A honeycomb louvre is placed inside the spot to avoid glaring.

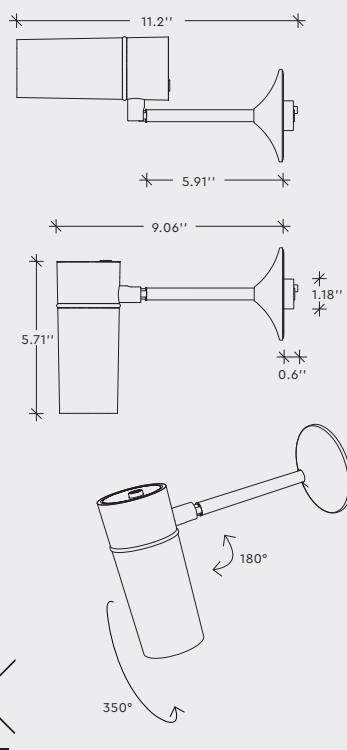

The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk

DATA

Collection	STORM SYSTEM®
Product	Storm Medium Wall 160 – GU10
Article no.	1N01.0162.xx01

SPECIFICATIONS

Weight	23.5 oz
Materials	Aluminium and Brass
IP protection grade	IP20
Labelling	



Conforms to ANSI/UL
Std. UL 1598:2018
Cert. to CAN/CSA
Std. CSA C22.2#250.0:2018

199499

Safety distance



Supply

120V GU10 max. rating: LED 8W

Insulation class



Fixture finish

For xx-codes review STORM SYSTEM® – COLOUR CODES ➤

ADDITIONAL REQUIREMENTS

Light Source &
Junction Kit

MR16 LED (light source not included)
review STORM SYSTEM® – CONFIGURATION ➤

For further support contact LITES ON WEST
245 West 29th Street, 6th floor | NY, NY 10001
T: 212 775 6363 | F: 212 775 0355
E: info@litesonwest.com

NOTE

When using honey combs the lumen output will be reduced with 30% in efficiency
Suitable wallbox: Kaiserbox EAN: 7611614061856

STORM MEDIUM WALL 250 GU10




STORM SYSTEM®

The Storm Medium Wall is part of the STORM SYSTEM® Medium collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

The Storm Medium Wall is designed to be installed on walls or ceilings with minimum build-in depth. The fixture is mounted directly on the surface.

The Storm Medium Wall is designed to rotate 350° and angles 180°. A honeycomb louvre is placed inside the spot to avoid glaring.

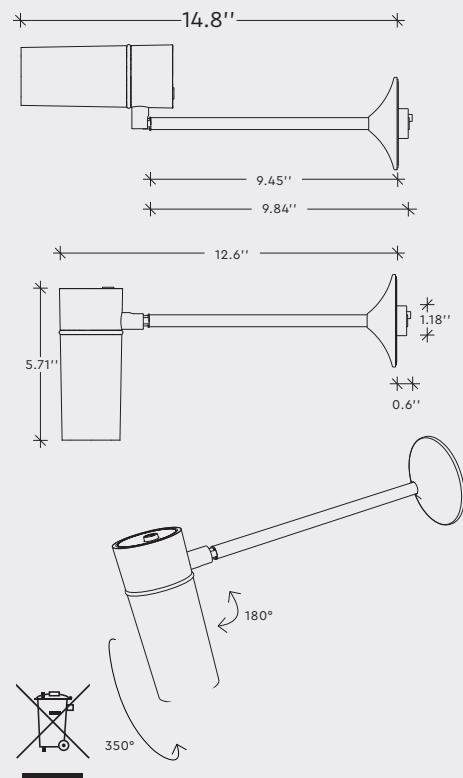

The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk

DATA

Collection

STORM SYSTEM®

Product

Storm Medium Wall 250 – GU10

Article no.

1N01.0122.xx01

SPECIFICATIONS

Weight

24 oz

Materials

Aluminium and Brass

IP protection grade

IP20

Labelling



Conforms to ANSI/UL
Std. UL 1598:2018

Cert. to CAN/CSA
Std. CSA C22.2#250.0:2018

199499

Safety distance




120V GU10 max. rating: LED 8W

Supply



Insulation class



Fixture finish

For xx-codes review STORM SYSTEM® – COLOUR CODES ➤

ADDITIONAL REQUIREMENTS

Light Source & Junction Kit

MR16 LED (light source not included)

review STORM SYSTEM® – CONFIGURATION ➤

For further support contact LITES ON WEST
245 West 29th Street, 6th floor | NY, NY 10001

T: 212 775 6363 | F: 212 775 0355

E: info@litesonwest.com

NOTE

When using honey combs the lumen output will be reduced with 30% in efficiency

Suitable wallbox: Kaiserbox EAN: 7611614061856

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed.

Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:



Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

COMPONENTS

- Storm Medium Wall
- spring
- honeycomb

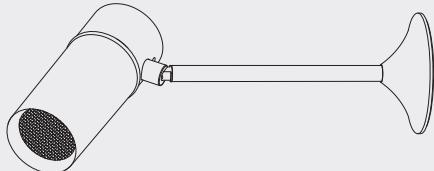


STORM MEDIUM WALL

ASSEMBLY INSTRUCTION PAGE 1 OF 2

PROCEDURE FOR FITTING A GU10 LIGHT SOURCE


STEP 1

Remove the front tube by gently rotating.




STEP 2

Pull back the spring.





STEP 3

Mount your chosen GU10 light source.



STEP 4

Gently release the spring. Then mount the front tube by slightly rotating the tube into place.

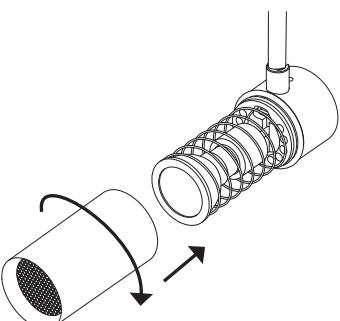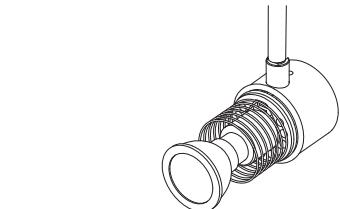

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed.

Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:


Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:


If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

COMPONENTS

- Storm Medium Wall
- spring
- honeycomb

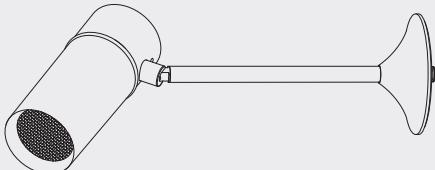

Dimensions for suitable wall boxes

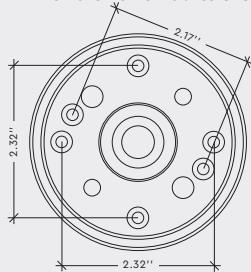


STORM MEDIUM WALL

ASSEMBLY INSTRUCTION PAGE 2 OF 2

STEP 1


Make sure main power is off!

Connect the wires. Place the wires inside the junctionbox. Kaiserbox nr. 9955 is recommended as a junctionbox.

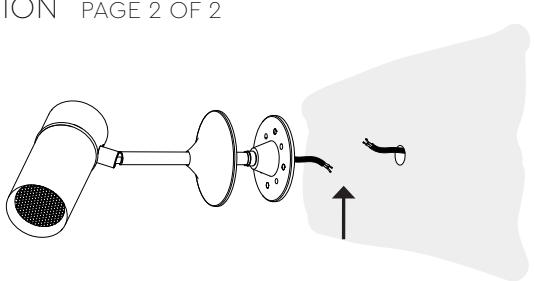


STEP 2

Mount the fixture onto the wall or ceiling. Then gently slide the cover to the base plate for fixation.

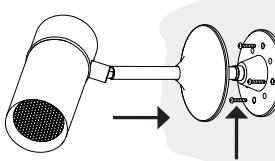



STEP 3

Adjust the fixture to the desired position.

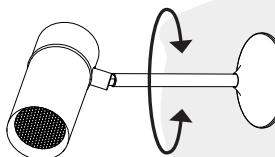

NOTE:

The fixture can tilt 90°. To change the direction the fixture tilts; remove the front of the fixture, turn the screw located in the "leather V" two or three times, rotate the remaining part of the fixture 180°, then tighten the small screw and reattach the front of the fixture.

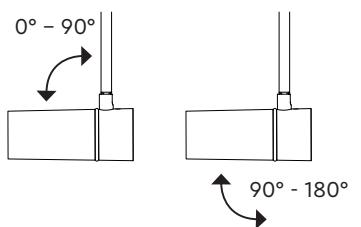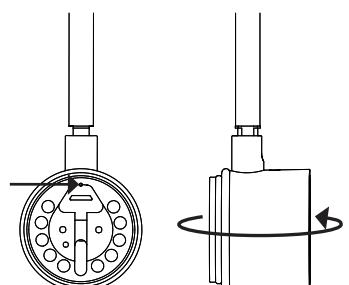

IMPORTANT INFORMATION

Disassembly must be performed by a certified electrician only, and instructions must be followed.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.


STORM MEDIUM WALL

DISASSEMBLY INSTRUCTION

STEP 1


Make sure main power is off!

Gently slide the cover away from the base plate.

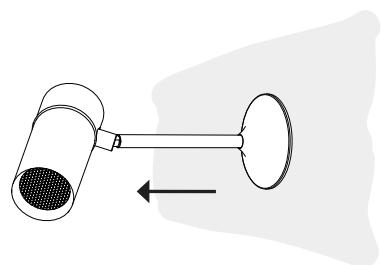

STEP 2

Unscrew the fixture from the wall or ceiling.

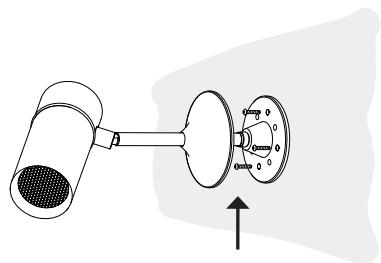

STEP 3

Disconnect the cables.

