





#### STORM SYSTEM®

The Storm Medium Sun is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

A soft light shines through the alabaster stone, and provides a pleasant light.

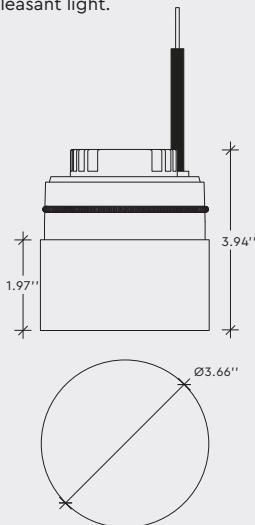

#### FORWARD CURRENT CHARACTERISTICS

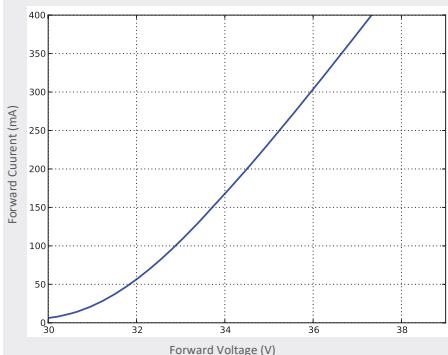

The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact [info@onea.dk](mailto:info@onea.dk)

## STORM MEDIUM SUN DIMMABLE

#### DATA

Collection  
Product  
Article no.

STORM SYSTEM®  
Storm Medium Sun – Dimmable  
1N01.0113.3265

#### SPECIFICATIONS

Weight  
Materials  
IP protection grade  
Labelling

22.6 oz  
Aluminium and natural stone  
IP20



Conforms to ANSI/UL Std. UL 2108:2015  
Cert. to CAN/CSA Std. CSA C22.2#250.13:2017

Fixture finish  
Light Source

Alabaster  
LED Constant Current (included)

Supply  
CCT  
Insulation class

For IES/LDT lux files review  
STORM SYSTEM® – LUX FILES ➤  
5W | 33V | 130mA  
2500K (nature stone – variations can occur!)  
Class III ⚡

#### ADDITIONAL REQUIREMENTS (NOT INCLUDED)

Junction kit

review STORM SYSTEM® – CONFIGURATION ➤  
For further support contact LITES ON WEST  
245 West 29th Street, 6th floor | NY, NY 10001  
T: 212 775 6363 | F: 212 775 0355  
E: [info@litesonwest.com](mailto:info@litesonwest.com)

This product shall always be powered by SELV LED driver, output voltage of this driver in open circuit must not exceed 60V. Do NOT cover the LED driver or locate LED driver on top of light fixture.


#### NOTE

Be cautious while putting on/off the power supply, as excess current, excess voltage or reverse voltage may get injected to the device in some cases.

The light source of this light fixture is not replaceable; when the light source reaches its end of life the whole light fixture must be replaced.

If cable connection is completed with included junction box, IP20 protection grade is obtained.

#### INSTALLATION DEPTH






#### STORM SYSTEM®

The Storm Medium Sun is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

A soft light shines through the alabaster stone, and provides a pleasant light.

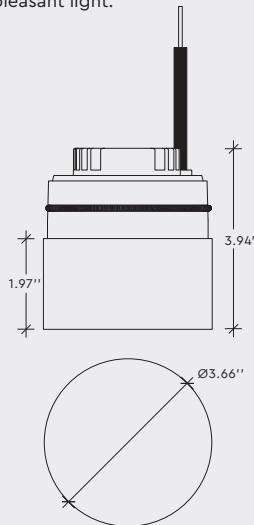

The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact [info@onea.dk](mailto:info@onea.dk)

## STORM MEDIUM SUN DIM TO WARM

### DATA

Collection	STORM SYSTEM®
Product	Storm Medium Sun – Dim To Warm
Article no.	1N01.0113.3266

### SPECIFICATIONS

Weight	22.6 oz
Materials	Aluminium and natural stone
IP protection grade	IP20
Labelling	



Conforms to ANSI/UL  
Std. UL 2108:2015

**Intertek**

5005519

Cert. to CAN/CSA  
Std. CSA C22.2#250.13:2017

Fixture finish	Alabaster
Light Source	LED Constant Current (included)

For IES/LDT lux files review  
[STORM SYSTEM® – LUX FILES](#) ➤

Supply	5W   33V   130mA
CCT	2500 – 2000K (nature stone – variations can occur!)
Insulation class	Class III

### ADDITIONAL REQUIREMENTS (NOT INCLUDED)

Junction kit [review STORM SYSTEM® – CONFIGURATION](#) ➤

For further support contact LITES ON WEST  
245 West 29th Street, 6th floor | NY, NY 10001  
T: 212 775 6363 | F: 212 775 0355  
E: [info@litesonwest.com](mailto:info@litesonwest.com)


This product shall always be powered by SELV LED driver, output voltage of this driver in open circuit must not exceed 60V. Do NOT cover the LED driver or locate LED driver on top of light fixture.

### NOTE

Be cautious while putting on/off the power supply, as excess current, excess voltage or reverse voltage may get injected to the device in some cases.

The light source of this light fixture is not replaceable; when the light source reaches its end of life the whole light fixture must be replaced.

### INSTALLATION DEPTH



#### IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed.

Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

#### CLEANING AND MAINTENANCE:


Use a soft moist cloth for cleaning. No further maintenance is required.

#### WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

#### COMPONENTS

- Storm Medium Sun



#### PLEASE NOTE:

If the spring on the fixture is damaged, do not proceed installation – contact your dealer!

# STORM MEDIUM SUN

## ASSEMBLY INSTRUCTION


### STEP 1

**Make sure main power is off!**

Mount the chosen junction kit.

Mount the fixture into the plaster ring/backmounted ring. Do this by slightly rotating the fixture into the plaster ring/back-mounted ring.

**NOTE:** When rotating the fixture choose the direction with the least resistance.

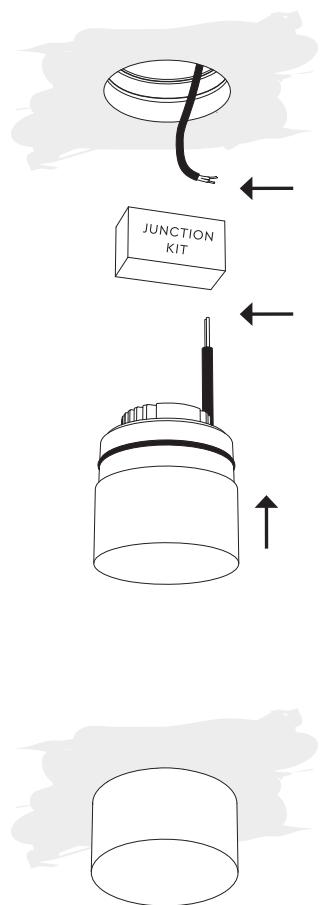

## IMPORTANT INFORMATION

Disassembly must be performed by a certified electrician only, and instructions must be followed. Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

## WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.


# STORM MEDIUM SUN

## DISASSEMBLY INSTRUCTION

### STEP 1

**Make sure main power is off!**

Take hold of the fixture and pull down gently, whilst slightly rotating.



**NOTE:** When rotating the fixture choose the direction with the least resistance.

### STEP 2

Disconnect the cables

